


Indoor Waterproof Glued Heat Shrinkable Tube

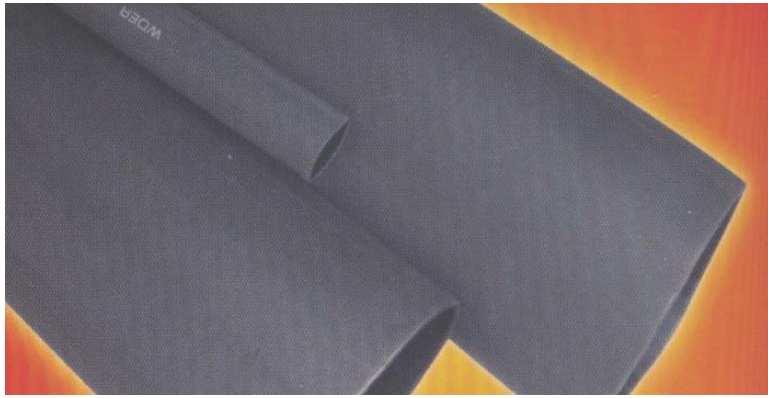

Specification


TEST ITEM	VALUE
Operating Temperature	-55°--125°C
Tensile Strength	≥ 14Mpa
Dielectric Strength	≥ 25kV/mm
Elongation to Break	400%

Application: Heat-shrinkable tubing with internal hot-melt adhesive coating, For Sealing against moisture and environmental protection.

SIZE (mm)	AS SUPPLIED (mm)		AFTER RECOVERY (mm)		
	I.D.	W.T.	W.T. OF ADHESIVE	I.D.	
Ø 3.2	3.3 ± 0.30	0.95	0.35	1.00	
Ø 4.8	4.8 ± 0.30	1.1	0.50	1.60	
Ø 6.4	6.6 ± 0.40	1.2	0.60	2.20	
Ø 7.9	7.9 ± 0.40	1.3	0.60	2.70	
Ø 9.5	9.6 ± 0.40	1.4	0.65	3.20	
Ø 12.7	12.8 ± 0.50	1.6	0.75	4.20	
Ø 15.0	15.1 ± 0.50	1.8	0.85	5.20	
Ø 19.1	19.1 ± 0.50	2.0	0.90	6.30	
Ø 25.4	25.4 ± 0.50	2.1	0.90	8.50	

Outdoor Waterproof Glued Heat Shrinkable Tube

Application: Dual wall hot-melt adhesive inner liner, High shrink ratio 3:1. 4:1, Joint cover for cable and pipe, Connector cover for CATV.

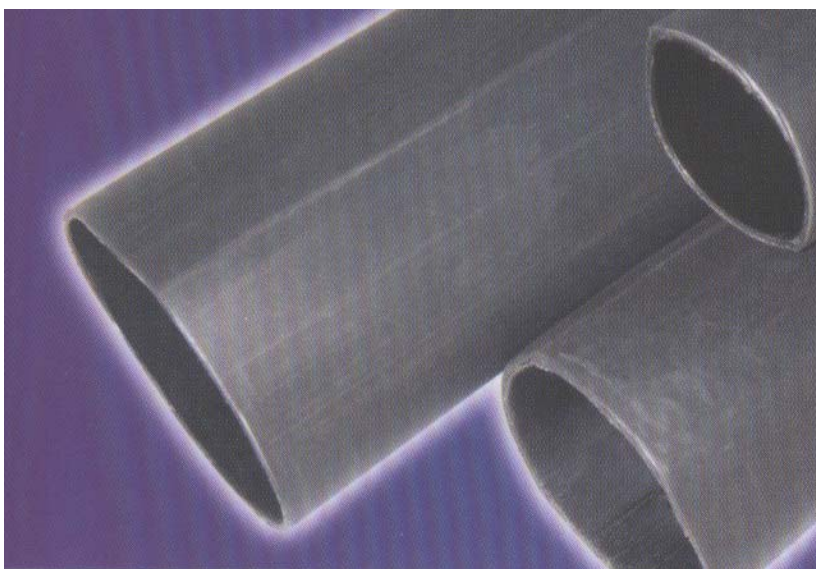

Specification:

Test Item	Typical Value
Tensile strength	10.4Mpa
Tensile strength after aging	158°C, 168hrs, remains 70%
Elongation after break	200%
Elongation at break after aging	158°C, 168hrs, 100%
Heat shock	250°C, 4hrs, no flow, drop
Cold bend	-30°C, 1hrs, no cracking
Voltage withstand	AC 2500V 60sec, no breakdown
Break down voltage	Above AC 2500V
Flammability	Self extinguish in 30 sec
Copper stability	158°C, 168hrs, no corrosion
Water absorption	0.5°C

SIZE (mm)	AS SUPPLIED (mm)		AFTER RECOVERY (mm)		
	I.D.	W.T.	W.T. OF ADHESIVE	I.D.	
Ø 28	28	2.54	0.90	9.30	
Ø 33	33	2.54	1.00	11.00	
Ø 38.1	38.1	2.54	1.00	12.70	
Ø 44	44	2.54	1.00	14.60	
Ø 52	52	2.54	1.00	17.30	
Ø 70	70	2.54	1.00	23.30	