


High Shrink Ratio Tube

Application: Heat shrinkable tubing for components with large variation in diameters.

Ratio x 4

SIZE INCH	AS SUPPLIED (mm) I.D.	AFTER RECOVERY (mm) I.D. MAX	W.T.	STANDARD LENGTH (M)
3/4	19.1/4.6	4.6	1.7	1.22
1	25.4/7.0	7	1.7	1.22
1-1/2	38.1/9.5	9.5	1.7	1.22
2	50.8/14.0	14	1.7	1.22
3	76.2/20.6	20.6	1.7	1.22
4	102/26.7	26.7	1.7	1.22
4-1/2	115/36.8	36.8	1.7	1.22

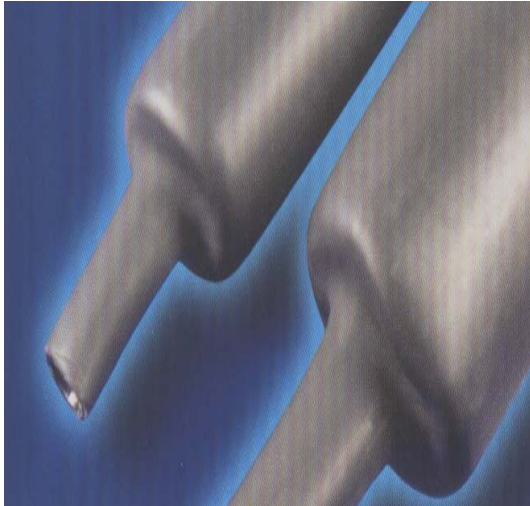

Ratio x 3

NORMAL SIZE INCH	AS SUPPLIED (mm)		AFTER RECOVERY (mm)		STANDARD LENGTH (M / SPOOL)
	I.D.	W.T.	I.D. MAX	W.T.	
1/16	1.6	0.15	0.5	0.45	200
1/18	3.2	0.18	1.0	0.55	200
3/16	4.8	0.20	1.5	0.60	100
1/4	6.4	0.22	2.0	0.65	100
3/8	9.5	0.25	3.0	0.75	100
1/2	12.7	0.25	4.0	0.80	50
3/4	19.1	0.35	6.0	0.90	50
1	25.4	0.45	8.0	1.20	50
1-1/2	39.0	0.50	13.0	1.25	50

PVC Heat Shrinkable Tube

Application: This 105°C set tube has passed safety certification. The content of metal, lead, and chrome is up to approved levels of Europe and the US standards.

